

Lifting & Hoisting

Chain Blocks

1t & 2t Combined Hoisting Assembly

Compact and robust, this integrated hoist and trolley offers theft protection, and is ideal for locations where headroom is constrained. The ergonomic design allows for minimal operator effort to raise the load and enable exact positioning, whilst easily traversing heavy loads correspondence

Capacity:
1.0t & 2.0t

Applications:
Construction, Engineering, Infrastructure, Manufacturing, Mining, Ports, Utilities.

Complies with:
AS 1418

Product Features

- Adjustable gear trolley.
- Cast steel safety latches.
- Factory proof tested to 1.5x W.L.L.
- Super strength zinc plated alloy load chain.
- Weather protected automatic Weston brake.







Lifting & Hoisting

Chain Blocks

SPECIFICATIONS

PRODUCT CODE	WORKING LOAD LIMIT (W.L.L.)	STANDARD LIFT	BEAM WIDTH	MIN. HEADROOM HEIGHT	NET WEIGHT
CHCBGTOZ010	1.0t	3m	74mm – 203mm	259mm	23.5kg
CHCBGTOZ020	2.0t	6m	85mm – 203mm	376mm	43.7kg

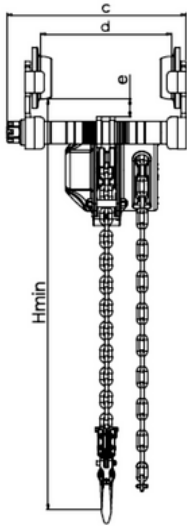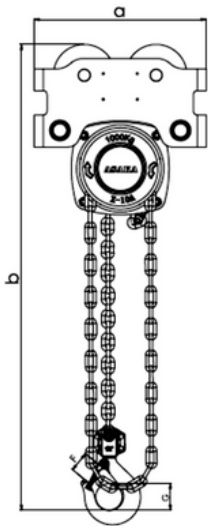

DIMENSIONS

PRODUCT CODE	A	B	C	D	E	F	G	Hmin
CHCBGTOZ010	240mm	382mm	312mm	203mm	26mm	30mm	44mm	259mm
CHCBGTOZ020	280mm	481mm	329mm	203mm	35mm	34mm	49mm	376mm



Ready to speak with an expert? Call now on 1300 692 565
Visit us today at ozblok.com.au