



# Lifting & Hoisting

## Chain Blocks

### 3t & 5t Combined Hoisting Assembly

Compact and robust, this integrated hoist and trolley offers theft protection, and is ideal for locations where headroom is constrained. The ergonomic design allows for minimal operator effort to raise the load and enable exact positioning, whilst easily traversing heavy loads correspondence

*Capacity:*  
3.0t & 5.0t

*Applications:*  
Construction, Engineering, Infrastructure, Manufacturing, Mining, Ports, Utilities.

*Complies with:*  
AS 1418

#### Product Features

- Adjustable gear trolley.
- Cast steel safety latches.
- Factory proof tested to 1.5x W.L.L.
- Super strength zinc plated alloy load chain.
- Weather protected automatic Weston brake.







# Lifting & Hoisting

## Chain Blocks

SPECIFICATIONS

PRODUCT CODE	WORKING LOAD LIMIT (W.L.L.)	STANDARD LIFT	BEAM WIDTH	MIN. HEADROOM HEIGHT
CHCBGTOZ030	3.0t	3m	74mm – 180mm	593mm
CHCBGTOZ050	5.0t	6m	98mm – 180mm	741mm

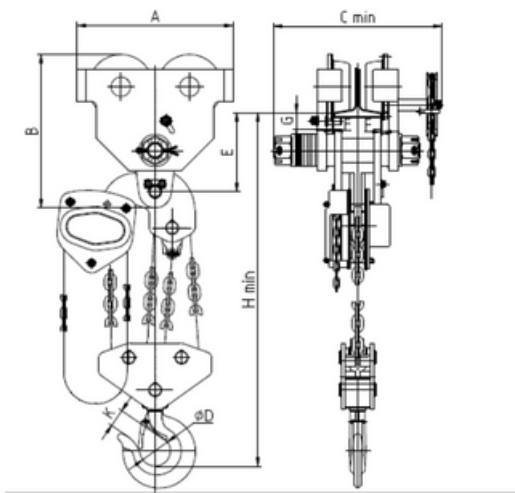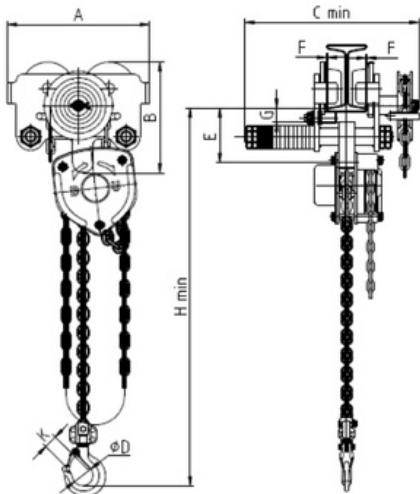

DIMENSIONS

PRODUCT CODE	A	B	C	D	E	F
CHCBGTOZ030	363mm	230mm	14mm	304mm	30mm	3mm
CHCBGTOZ050	436mm	260mm	18mm	330mm	42mm	3mm



Ready to speak with an expert? Call now on 1300 692 565

Visit us today at [ozblok.com.au](http://ozblok.com.au)